




DOCKSHELTER

INFLATABLE

Inflatable dock shelter is an important part in the field of warehousing and logistics. After being inflated, the airbags on both sides and the top tightly wrap the rear of the compartment. The airbags on both sides adopt an L-shaped structure, to ensure a tight seal between the bottom of the airbags on both sides and the wall. Cooperates with dock leveler to form a closed loading environment to prevent the entry of external debris, airflow, rain, etc., and ensures that the loading and unloading work is carried out conveniently, cleanly and safely.

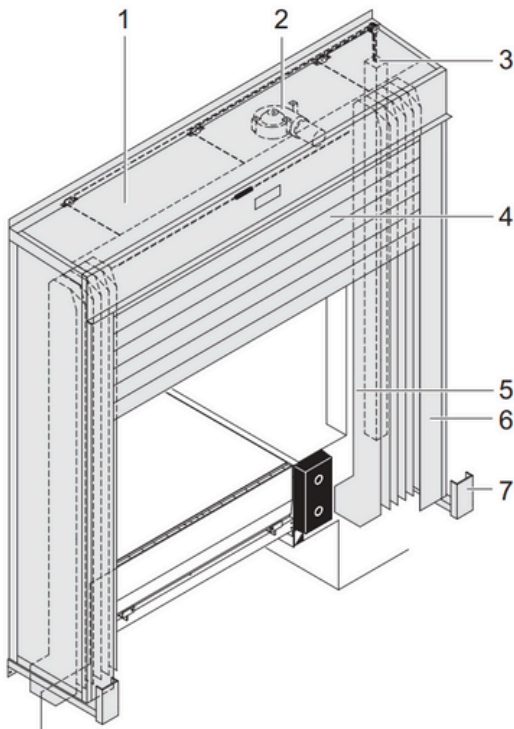

- 1. Insulated panels
- 2. Blower
- 3. Counter balance
- 4. Top bag
- 5. Side bag
- 6. Curtain strips
- 7. Steel guard



The bags have replying system to flatter down in 15 SEC



Technical Specification

Size : Customized according to customer requirements

Thickness of door curtain(mm) : 0.9(optional)

Material : Polyester fabric

Max extended force : 250 N/mm²

Friction coefficient of PVC : 0.4

Frequency of use : ≥1000 times/day

Thickness : 3mm

Safety measures : Left and right side are equipped with orange warning strips

Features : Dustproof and heat preservation, insect and rain protection, etc.; it is applicable to a wider range of models

Front panels : Black framed pvc with differentiated frames and antiscratching structure.

Thickness of door curtain(mm) : 0.9(optional)

Structure : Sidewalls: 42mm thick sandwich panel with metal structure.

Airbags : High resistance texture, waterproof and anti-scratch frame with inner replying system.

Fan : Feeding: 380-415V threephase min. 10A



22/355 ซอยเลียบคลองสอง 23 แขวงสามวาตะวันตก
เขตคลองสามวา กรุงเทพมหานคร 10510

Tel. 02-3663-6292 Fax. 02-363-6258



kmwsales1@gmail.com



www.kmw.co.th

